



AIRPIVOT

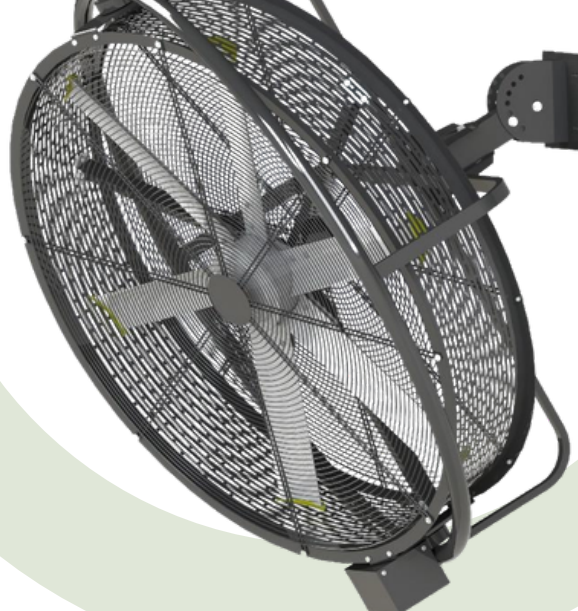


The Anemol AIRPIVOT wall fan is designed to provide ventilation in spaces without a ceiling option, offering horizontal, vertical, and 34° pivoting. Its robust design, aluminum blades, and external control panel allow for precise speed (0-100%) and timer control, while its solid mounting and brushless DC motor ensure efficient and quiet operation in industrial environments.

TECHNICAL DRAWING

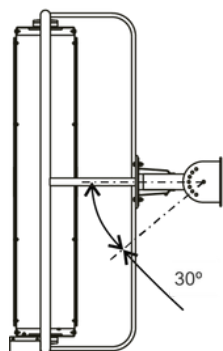

Side view, 30° vertical adjustment

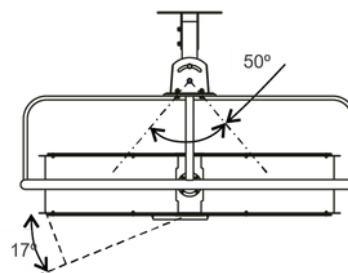

Floor view, 34° pivoting option and 50° horizontal adjustment

CONTROL



Parameter	90	120	150
Diameter	0,9 m (3 ft)	1,2 m (4 ft)	1,5 m (5 ft)
Number of blades	6		
Standard color	Matte black on the outer grill and housing. Blades and controller in 6063 aluminum		
Motor power	0.5 kW	0.5 kW	0.95 kW
Supply voltage	200VAC ~ 240VAC I, 50/60 Hz; 100VAC ~ 120VAC I, 50/60 Hz		
Maximum speed	700 rpm	450 rpm	400 rpm
Protection rating	IP54		
Sound level	<65 dBA		
Weight	80 kg (176 lb)	92 kg (203 lb)	105 kg (232 lb)
Motor type	Brushless DC motor		
Airflow	16,800 m ³ /h	25,200 m ³ /h	43,200 m ³ /h
Controller	External control panel that allows timing and regulating the motor power		

The technical documentation is updated periodically. Anemoi reserves the right to modify all or part of the content of this document without prior notice.